


Technical Specifications For Tilequard Vamac Intermediate Movement Joint

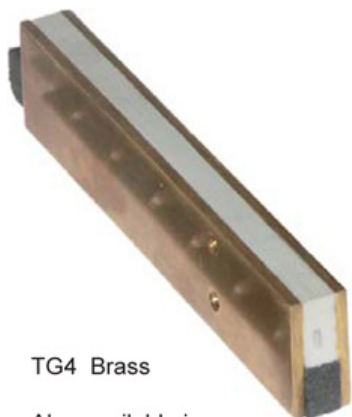

TG4 Brass

Also available in
aluminium and stainless steel

Tilequard Vamac Series Overview

Specifically designed for areas requiring low smoke emissions, suitable for use with all hard flooring where edge protection and an impervious, maintenance free movement joint is required.

Rail stations, underground stations, subways, hospitals, airports, shopping malls and exhibition halls
Meets the strict requirements for low flammability, smoke density and toxic fumes for materials used underground.

Tilequard Vamac Series Composition

The movement joint, having a visible width of 10mm, is constructed using: Central core incorporating upper Vamac rubber (grade EA1b) insert and lower F025 flame retardant foam insert

- Vamac rubber (grade EA1b) has been assessed and approved for use by London Underground Limited
- Vamac rubber (grade EA1b) properties include BS903 hardness 95 I.R.H.D, tensile strength 8Mpa min, elongation at break 50% min; ISO 4649 abrasion <250mm³; SATRA slip resistance pass; RSE/STD013 Part 4 good graffiti and fluid resistance
- Colours available: black, stone or grey

Metal side plates

- Materials available: Aluminium, Stainless steel or brass
- Width: from 1mm upwards

Tilequard Vamac Series Fire Behaviour Performance

Property	Test Method *		Result		LUL 1-085
Flammability	ISO 11925-2		<150mm	B _{fl}	Pass
	ISO 9239-1		>11.2kW/m ²		
Smoke Density	BS 6853 Annex D.8.6	17.4			
Toxicity	BS 6853 Annex B.2	0.47			

*Refer to formal reports for test specimen configuration

VAMAC® is a registered trade mark of Dupont

FOR MORE INFORMATION TELEPHONE: +44 (0)1782 536719

© 2023 Donmini MJ Ltd - Movement Joints Registered in England

Registered Address: Unit 6 The Capstan Centre, Thurrock Park Way, Tilbury, Essex RM18 7HH

IMPORTANT

Whilst all reasonable care is taken in compiling technical data on the company's products, all recommendations or suggestions regarding the use of such products are made without guarantee since the conditions of use are beyond the company. It is the customers responsibility to satisfy himself that each product is fit for the purpose for which he intends to use it and that the actual conditions of use are suitable.